

Tank Monitor

1. Welcome to Waterwatch!

If this is your first Waterwatch monitor:

Using your phone camera, scan the QR code on the front of this brochure to begin the account setup. Alternatively go to signup.waterwatch.io in your web browser.

Follow the setup instructions to:

Create your account and organisation
Select your monitor

Pick your subscription type (free or premium)

Next, download the app:

Using your mobile phone, search for the [Waterwatch Mobile App](#) in the Play Store or the App Store and download.



Log into the app using your new Waterwatch account email address and password.

2. Add your tank

Open the Waterwatch mobile app:

If this is your first time using the mobile app, you'll be prompted to add your new monitor by scanning the QR code on the front of this brochure.

If you are adding another monitor to an existing organisation, select the Add tank button at the bottom of your home page.



Follow the app instructions to scan the QR code on the front of this brochure or by entering the claim code.


Need help?

Chat: waterwatch.io
Guides: help.waterwatch.io
Phone: NZ (03) 477-2779
AUS (07) 5235-5288
Email: info@waterwatch.io

3. Ready to Install Your Sensor?

Now that you have created your account it's time to setup and install your tank monitor.

Tools you'll need:



50 - 60mm Hole Saw




4 X M4 Screws
(Supplied)



Tape Measure



Magnet wand (supplied)



The magnet wand is used to activate the Bluetooth connection during the Set Up Wizard

You'll need to be **at your tank** when you are ready to follow the Set Up Wizard steps.



Before you go to your tank, make sure you have your **wifi password** with you so that you can connect when prompted.

The Set Up Wizard will help you to:

- ◆ Connect to wifi
- ◆ Connect to the tank monitor with Bluetooth
- ◆ Drill a 50 - 60mm hole in your tank
- ◆ Take measurements
- ◆ Attach your tank monitor to the tank
- ◆ Verify your first measurements
- ◆ Name your tank monitor

*For best results your tank monitor should be installed at least 300mm above the highest water level.
The tank monitor is designed to detect water surfaces from a 200mm distance or further.*

Select your monitor

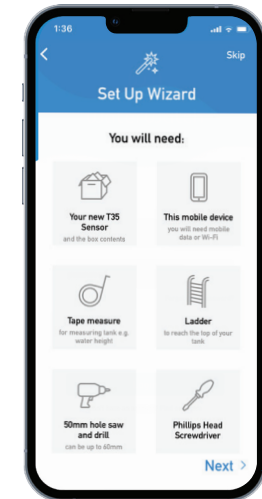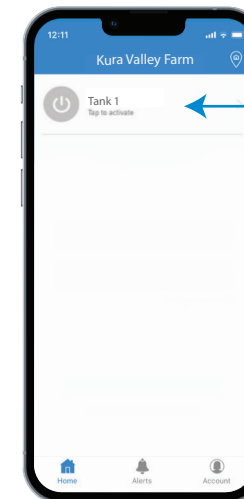


Select to begin the Setup Wizard

Tips for successful installation

For best results your tank monitor should be installed at least 300mm above the highest water level. The tank monitor is designed to detect water surfaces from a 200mm distance or further.

Ensure that there are no obstructions directly under your chosen mounting position such as ball cocks, inflow and outflow pipes.

The tank monitor should be as close to level as possible, at no more than a three degree angle.

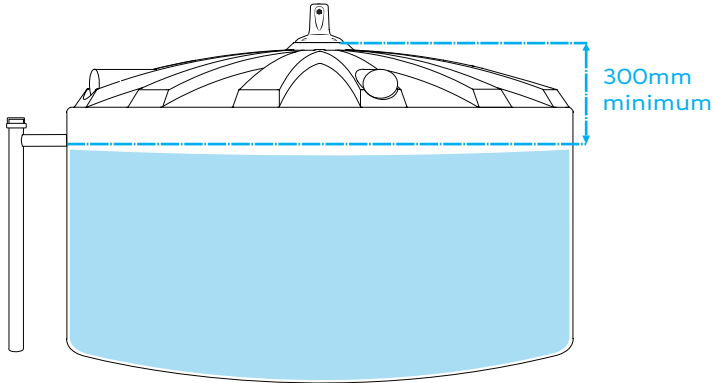


Plastic Tanks

The best installation spot is on the center of the tank roof. This is generally the highest point and provides an unobstructed view to the water surface.

If the tank monitor can't be installed level, angled mounting shims can be purchased from our online store. Otherwise the tank lid can be used.

Remember to leave at least 300mm between the tank monitor and the highest water level!

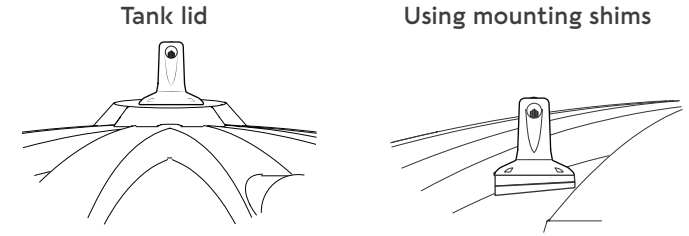


Concrete Tanks

Mounting high (but off center) using the mounting shims is the most common method for installation on concrete tanks.


You will need to supply your own concrete screws.

Some customers prefer replacing the inspection lid with timber to install the tank monitor.

Remember to leave at least 300mm between the tank monitor and the highest water level!

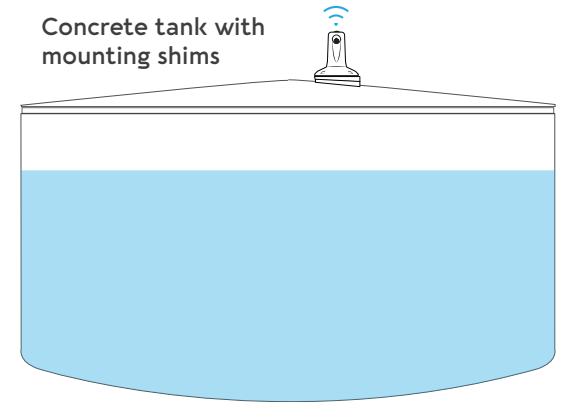

Quick App Guide

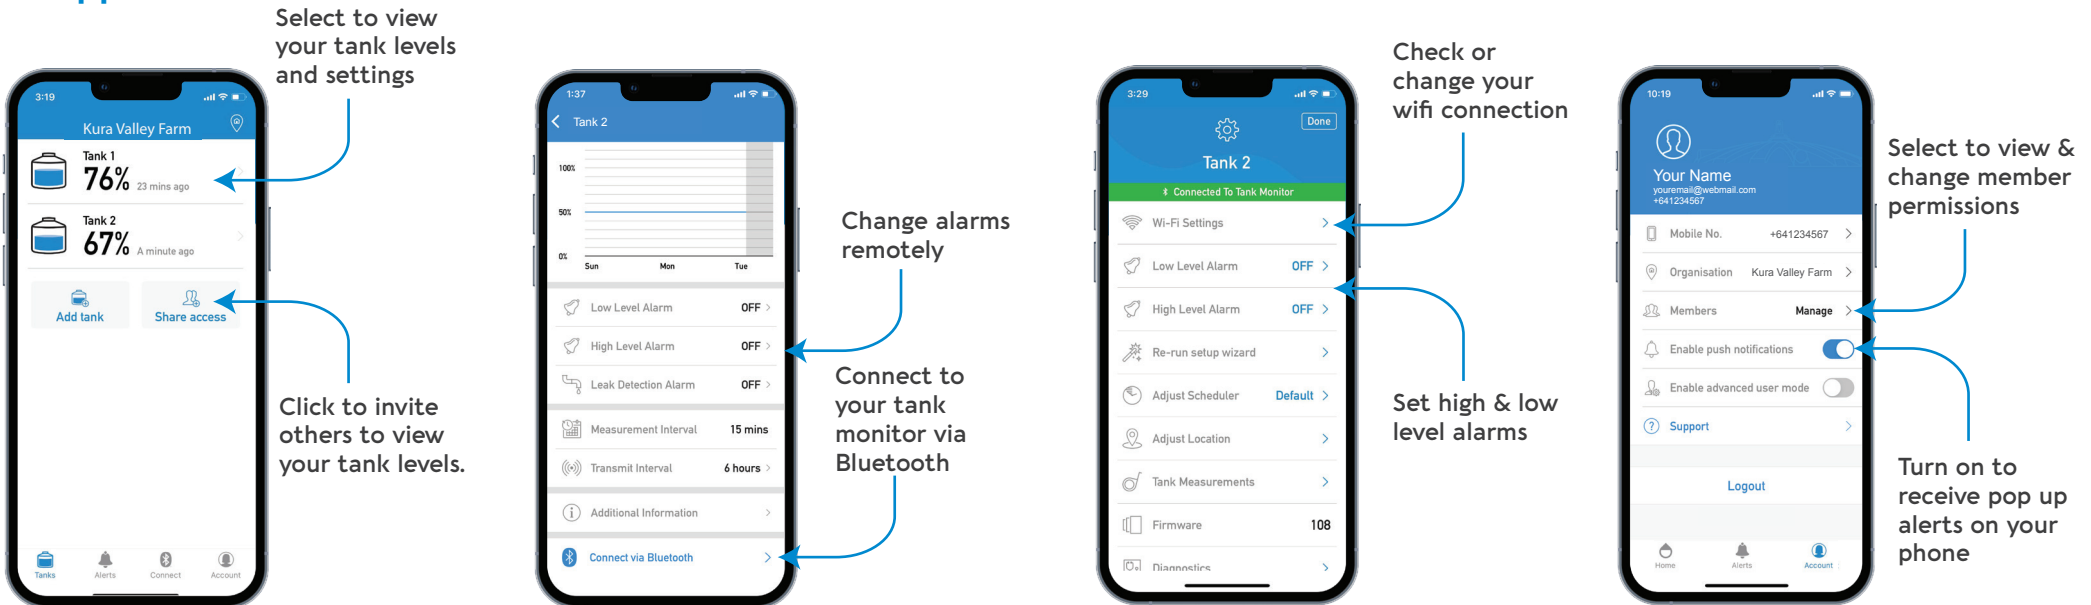

Connect to your tank monitor via Bluetooth to access this screen